

High Performance Fluoropolymer Bearings



R

RULON®

*Long-wearing,
maintenance-free
bearing materials*

- Self-lubricating design
- Low coefficient of friction
- Temperature resistant
- Dimensionally stable in fluids
- Chemically resistant
- Flexible material design
- Low weight/high strength ratio


SAINT-GOBAIN
PERFORMANCE PLASTICS

Mic

MATRIZ TAMPICO

Tels. (833) 22756 56 al 58,
(833) 22758 79 al 80,
(833) 22748 00
ventas@matindceta.com

 www.matindceta.com

SUCURSAL COATZACOALCOS

Tel: (921) 212 15 45
ventascoatza@matindceta.com

SUCURSAL CENTRO

Tel: (442) 210 68 55
ventasqro@matindceta.com

Saint-Gobain is a worldwide group whose history spans more than three centuries. Created in 1665 in France, Saint-Gobain launched its first industrial Department with the production of mirrors, which adorn the famous Hall of Mirrors at Versailles.

Expansion beyond French borders began in the middle of the 19th century. An international pioneer, Saint-Gobain established a glass factory in Germany in 1857, another in Italy in 1889 and one in Belgium in 1904. The group moved toward the New World in 1937 with the opening of a plant in Brazil.

Early Diversification

Strongly established in flat glass production, Saint-Gobain began looking toward other activities at the beginning of the 20th century. The company entered the papermaking business in 1925, and the insulation business in 1936. The 1970 addition of the company Pont-à-Mousson, the world leader in cast iron pipes, reinforced Saint-Gobain's position in the construction market.

Throughout the 1970's and 80's the Saint-Gobain Group continued to pursue both internal and external growth, which culminated with the 1990 acquisition of Norton Company, one of the world's leading abrasives and ceramics manufacturers.

Norton Performance Plastics in turn acquired Furon Company and created the new Saint-Gobain Performance Plastics, combining decades of experience and leadership in metal-backed and polymer bearings and components.

The Rulon® trademark had been acquired by Furon in the purchase of Dixon Industries Corporation, founded in 1876 by Ezra Dixon, specializing in self-lubricating bearings for the then emerging textile industry in the northeastern United States.

Rulon® Fluoropolymer Bearings

An Overview

Saint-Gobain Performance Plastics manufactures many different grades of composite bearing materials with distinct properties to accommodate a broad range of applications and industries. Our most popular grades are RULON® LR, RULON® J and RULON® 641.

RULON® Materials Outperform Metals

RULON® composites are ideal for non-lubricated, high-load applications in a variety of climates and operating environments, exhibit a high load capacity similar to bronze, powdered metal and steel, and provide longer wear and extended operating life without the costs associated with lubrication. RULON® materials also do not rust like metal components, so you can use them in environments where traditional metals corrode and fail. You will find Saint-Gobain Performance Plastics bearing materials in heavy-duty agricultural, automotive, construction, industrial, marine, railway, and material handling equipment.

RULON® components are rigid enough to support heavy loads, yet compliant enough to tolerate moderate amounts of shaft misalignment without highly stressing the ends of the bearings.

RULON® Fluoropolymers Outperform Polyamide

As a rule, polyamide is strictly limited to relatively light load applications and cannot compete with RULON® or metal materials in high load situations. Polyamide bearings are not as dimensionally stable as RULON® materials either, due to as much as 9% moisture absorption. The near-zero absorption rate of RULON® materials means there is negligible swelling and degradation of properties. It also enables tighter running clearances which increase the available bearing area and reduce the ingress of foreign particles which can become embedded and abrade the counterface material over time.

FEATURES	BENEFITS
Self-lubricating design	Provides maintenance-free operation and eliminates the need for costly and messy greasing systems.
Low coefficient of friction	Reduces wear and extends operating life and increases the efficiency of the equipment
Temperature resistant	Operates flawlessly in temperatures ranging from cryogenic levels to a high of 550°F (288°C)
Dimensionally stable in fluids (water, corrosive liquids, and chemical solutions)	Absorption rates are negligible, providing near zero swell
Chemically resistant	Compatible with a wide range of lubricants and media.
Flexible material design	Suitable for press fit, freeze fit, epoxy bonding, as well as conventional mechanical retention.
Low weight	Accommodates lightweight construction.

Cover photo: RULON® LR, RULON® J, and RULON® 641

Table of Contents

Overview	1
Materials Selection Guide	3
RULON® LR, J & 641	
Bearings Overview	5
RULON® LR Bearings	7
RULON® J Bearings	9
RULON® 641 Bearings	11
Standard Sizing Charts	
RULON® LR, J & 641 Bearings	13
RULON® Standard Metric Bearings	15
New Metric RULON® Standard Bearings	17
Application Inquiry Form	20



RULON® J

Materials Selection Guide



RULON® 641

3

COMMENTS

RELATIVE RATING
1=LOW, 5=HIGH

ENVIRONMENT

MATING SURFACE
STEEL & STAINLESS STEEL

RULON® GRADES

PERFORMANCE



Yale
HOISTS



perma
Lubrication Systems



WILFLEY
HEAVY DUTY
CENTRIFUGAL PUMPS

Flexitallic

Grade	AR	LR	J	641	W2	123	488	957	XL	F	142	945	1045	1337	1410	1439
Color	MAROON	MAROON	GOLD	WHITE	BLACK	BLACK	TURQ.	GREEN	TAN	GREEN	TURQ.	BLACK	GOLD	TAN	GOLD	WHITE
Max Load "P" (psi) MPa	1,000 (6.9)	1,000 (6.9)	750 (5.2)	1,000 (6.9)	1,000 (6.9)	1,000 (6.9)	1,000 (6.9)	1,000 (6.9)	1,200 (8.3)	1,000 (6.9)	1,000 (6.9)	1,000 (6.9)	1,000 (6.9)	1,000 (6.9)	750 (5.2)	1,000 (6.9)
Max Speed "V" (fpm) m/s	400 (2.0)	400 (2.0)	400 (2.0)	400 (2.0)	400 (2.0)	400 (2.0)	400 (2.0)	400 (2.0)	400 (2.0)	400 (2.0)	400 (2.0)	400 (2.0)	400 (2.0)	400 (2.0)	400 (2.0)	400 (2.0)
Max "PV" (psi-fpm) (MPa • m/s)	10,000 0.35	10,000 0.35	7,500 0.26	10,000 0.35	7,500 0.26	10,000 0.35										
Rb 25 & higher			X	X	X	X	X	X	X	X	X		X	X	X	X
Rc 35 & higher	X	X										X	X			
Painted metal and porcelain								X	X							
Aluminum				X						X						
FDA compliant					X		X								X	X
Steam	X	X			X	X	X	X	X			X	X		X	X
Wet	X	X			X	X	X	X	X	X	X	X	X	X	X	X
Dry	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Vacuum	X	X	X	X				X	X	X	X	X	X	X	X	X
Coefficient of friction	4	4	1	1	2	2	3	2	1	2	2	5	1	1	1	3
Creep resistance	3	4	3	4	4	4	4	4	4	4	5	5	2	2	2	4
Insulative prop.	YES	YES	YES	YES	YES	NO	NO	YES	YES	YES	NO	NO	YES	YES	YES	YES

Slightly softer than Rulon LR.
 Good creep resistance.
 Our Standard RULON® bearing grade.
 High Creep and Abrasion resistance.
 Lowest Coefficient of Friction of
 Rulon series.
 Excellent insulator.
 Widely used in the food processing
 industry.
 Very good operation in wet
 environments.
 Good thermal and electrostatic
 dissipation.
 Excellent abrasion resistance.
 Hot and dry applications.
 Low friction/wear against coated
 metal or porcelain surfaces.
 The best RULON® against
 aluminum surfaces.
 Standard tape liner material
 for Rulon composite bearings.
 Extensively used in machine
 tool guide ways.
 Extremely low deformation under
 load, and high impact resistance.
 FDA compliant.
 A standard material for
 compressor piston flip seals.
 A standard piston flip seal
 for submerged applications.

The list above is only a partial list of available formulations of RULON® PV data may be exceeded based on specific application requirements. Ask to speak to a Saint-Gobain Performance Plastics Application Engineer. RATINGS above are relative within RULON® family ONLY. For RULON® materials, coefficient of friction decreases with increasing load, and wear decreases with increasing surface hardness. For PTFE based materials, wear in steam and wet environments is higher than in dry environments. Saint-Gobain Performance Plastics offers enhanced Rulon grades which minimize this effect. Most RULON® products have excellent chemical compatibility. Data available upon request.



Yale
HOISTS

MELDIN[®]

perma
Lubrication Systems

BELZONA
Repair • Protect • Improve

WILFILEY
HEAVY DUTY
CENTRIFUGAL PUMPS

Flexitallic

Rulon® LR, J and 641 Bearings

Design Criteria

In choosing the appropriate RULON® bearing, the critical parameters of the application must first be determined. Bearing load, speed, PV, environment, mating surface, duty cycle, etc., all play an integral part in this choice. The more important criteria are described here, and their values are listed in the "Material Selection Guide".

Bearing Pressure

Bearing pressure is measured in pounds per square inch (psi) (MPa). It is calculated by distributing the total load in pounds (N) that the bearing is carrying by the projected area (I.D. x length in inches) (mm) of the bearing. This gives the average pressure that the bearing must support. Elevated temperatures reduce load capacity; lower temperatures generally increase static load capacity.

Bearing Speed

Bearing speed is determined by first calculating the circumference of the shaft in feet (meters), then multiplying by the RPM of the shaft. This gives the sliding or surface velocity of the bearing in surface feet per minute (SFM) (m/min – divide by 60 to get m/s). Lubrication or liquid cooling can extend these limits significantly.

Bearing PV

The third parameter is the product of operating pressure and surface velocity, defined as $P = \text{psi (MPa)} \times V = \text{ft/min (m/sec)}$ = PV. It is, in effect, a measure of the work the bearing is doing. While it is not the final answer, PV is an invaluable general guide in matching bearing to application.

Additional Considerations

Shaft hardness and finish: The various RULON® bearings are designed to operate against surfaces that have minimum hardness and finish requirements. These minimum values should be followed since each bearing's published dynamic properties and predicted wear rate are based on this system.

Friction and wear: RULON® bearings utilize custom compounds of PTFE. Like PTFE, they exhibit very low friction at low speeds, and low friction at high loads. These properties are diametrically opposed to most other materials and give RULON® bearings their smooth start/stop characteristics. They eliminate most stick-slip problems (Figure 1).



NORTH AMERICA

* Saint-Gobain Performance Plastics Corporation Wayne, New Jersey • USA	Phone: (1) 973-696-4700 Fax: (1) 973-696-4056		•	•					•
* Saint-Gobain Performance Plastics Corporation Bristol, Rhode Island • USA	Phone: (1) 401-253-2000 Fax: (1) 401-253-1755	•					•	•	•
* Saint-Gobain Performance Plastics Corporation Mundelein, Illinois • USA	Phone: (1) 847-949-0850 Fax: (1) 847-949-0198						•		•
* Saint-Gobain Performance Plastics Corporation Garden Grove, California • USA	Phone: (1) 714-630-5818 Fax: (1) 714-688-2614			•	•			•	•

EUROPE

* Saint-Gobain Performance Plastics Pampus GmbH Willich • Germany	Phone: (49) 2154 600 Fax: (49) 2154 60310		•	•				•	•
* Saint-Gobain Performance Plastics N.V. Kontich • Belgium	Phone: (32) 34 58 28 28 Fax: (32) 34 58 26 69				•	•	•	•	•
* Saint-Gobain Performance Plastics Asti Charnay-les-Macon • France	Phone: (33) 3 85 20 27 00 Fax: (33) 3 85 29 18 48								•
* Saint-Gobain Performance Plastics Asti Nanterre • France	Phone: (33) 1 55 68 59 59 Fax: (33) 1 55 68 59 68		•	•					•
Saint-Gobain Performance Plastics Agrate Brianza (Mi) • Italy	Phone: (39) 03 96 50 070 Fax: (39) 03 96 52 736		•	•	•	•	•	•	•
Saint-Gobain Performance Plastics Espana, S.A. Barcelona • Spain	Phone: (34) 93 682 8138 Fax: (34) 93 682 8143		•	•					
* Saint-Gobain Performance Plastics Espana, S.A. Logrono • Spain	Phone: (34) 94 14 86 035 Fax: (34) 94 14 37 095	•					•	•	

SOUTH AMERICA

* Saint-Gobain Ceramicas Industrias Ltda. Vinhedo-SP • Brazil	Phone: (55) 19 3876 8153 Fax: (55) 19 3876 8077		•	•	•	•	•	•	•
---	--	--	---	---	---	---	---	---	---

ASIA

* Saint-Gobain KK-Performance Plastics Tokyo • Japan	Phone: (81) 33 26 30 285 Fax: (81) 33 26 30 286		•	•	•	•	•	•	•
* Saint-Gobain Performance Plastics Korea Co., Ltd. Seoul • South Korea	Phone: (82) 25 08 82 00 Fax: (82) 25 54 15 50		•	•	•	•	•	•	•
* Saint-Gobain Performance Plastics Shanghai Co., Ltd. Shanghai • China	Phone: (86) 21 54 72 15 68 Fax: (86) 21 54 72 60 35	•	•	•	•	•	•	•	•
* Saint-Gobain Advanced Materials (Taiwan) Co., Ltd. Taipei • Taiwan	Phone: (886) 22 50 34 201 Fax: (886) 22 50 34 202		•	•	•	•	•	•	•
* Grindwell Norton Ltd. Bangalore • India	Phone: (91) 80 847 2900 Fax: (91) 80 847 2905		•	•	•	•	•	•	•
Saint-Gobain Advanced Materials (M) Sdn.Bhd Selangor Darul Ehsan • Malaysia	Phone: (60) 37 36 40 82/81 Fax: (60) 37 36 40 99		•	•	•	•	•	•	•

* Manufacturing Facilities

OmniLip™ is a trademark. Meldin®, Norglide®, Norslide®, OmniSeal® and Rulon® are registered trademarks.



Limited Warranty: For a period of 6 months from the date of first sale, Saint-Gobain Performance Plastics Corporation warrants this product(s) to be free from defects in manufacturing. Our only obligation will be to provide replacement product for any portion proving defective, or at our option, to refund the purchase price thereof. User assumes all other risks, if any, including the risk of injury, loss or damage, whether direct or consequential, arising out of the use, misuse, or inability to use this product(s). SAINT-GOBAIN PERFORMANCE PLASTICS DISCLAIMS ANY AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

NOTE: Saint-Gobain Performance Plastics Corporation does not assume any responsibility or liability for any advice furnished by it, or for the performance or results of any installation or use of the product(s) or of any final product into which the product(s) may be incorporated by the purchaser and/or user. The purchaser and/or user should perform its own tests to determine the suitability and fitness of the product(s) for the particular purpose desired in any given situation.

An Overview

Wear rate: RULON® bearings are self-lubricating because a small quantity of RULON® or PTFE material is transferred to the mating surface during startup. After initial break-in, the wear rate levels out. This phenomenon is why bearing finishes in the 63 to 125 RMS range (1.6 to 3.2 μm Ra) can be tolerated. Under recommended conditions, long bearing life is possible. Contamination, insufficient shaft hardness, coarse shaft finish, corrosion, etc., accelerate wear because the shaft/bearing cannot properly break-in under these conditions (Figure 2).

Performance Considerations

RULON® materials are capable of operating at PV values up to approximately 10,000 lb. ft./inch² x min (0.35 MPa x m/s). Wear rates as a function of time can be greatly affected by the load and speed

combinations. Therefore, higher PV values can be used where necessary for intermittent or short time duty. Lubricants or cooling fluids also permit higher PV values, primarily from speed, while generally decreasing wear.

Load

RULON® materials are generally limited to 1,000 psi (6.9 MPa). However, actual deformation is a function of the wall thickness used, temperature and load. Thinning the material so that cold flow will be minimized can increase the load-bearing capacity of most RULON® materials. Bonding the material will also increase its load-carrying ability – in some cases up to 5,000 psi (34.5 MPa). For higher loads, please contact our District Sales Manager so that arrangements can be made to discuss with an Applications Engineer.

Speed

While dry operation of RULON® materials is generally limited to 400 surface feet per minute (2.0 meters per second), under low-load conditions, higher speeds are possible with lubricants or liquid coolants. Silicone oils are not recommended as they interfere with the normal operation of RULON® bearings.

Friction

A rapid decrease in friction can be observed as load increases for most RULON® materials. Since start-up friction is extremely low, stick-slip is virtually eliminated. This makes RULON® materials the ideal choice for oscillating or start-stop applications. When fully lubricated with oil, RULON® materials exhibit a coefficient of friction in the .05 to .08 range typically obtained with lubricated metal bearings. In the event of lubrication failure, RULON® materials increase time to catastrophic failure, allowing time to replace bearings or components before significant damage occurs to critical metal components.



FIGURE 1: TYPICAL WEAR BEHAVIOR FOR RULON® BEARINGS


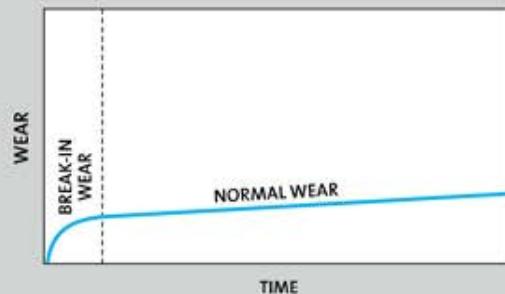


FIGURE 2: WEAR VS. SURFACE FINISH

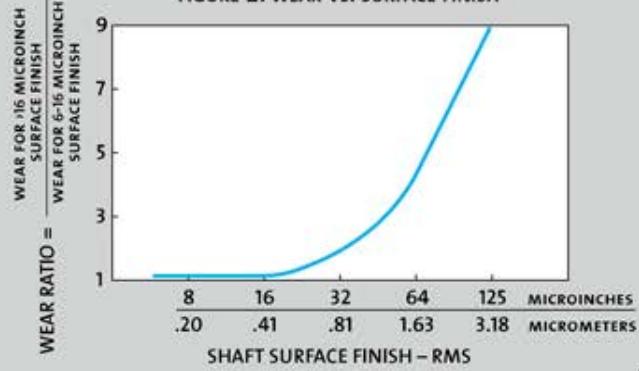

Rulon® LR Bearings

For continuous, non-lubricated service, RULON® LR sleeve bearings are capable of operating at PV values up to approximately 10,000 lb. ft./inch² x min (0.35 MPa x m/s). Figure 3 shows wear rates as a function of time at various PV values.

Load

RULON® bearings are generally limited to 1,000 psi (6.9 MPa). However, actual deformation is a function of wall

thickness, temperature and load (Figure 4). Because the thickness of the RULON® sleeve affects deformation under load, load limits can be increased by using thin wall bearings or bonding in place.

Speed

RULON® LR bearings are generally limited to 400 ft/min (2.0 m/s) under dry, low-load operation. Higher speeds are possible with lubricants or liquid coolants.

Friction


Friction decreases rapidly with increase in load (Figure 5). Figure 6 shows the effect of surface velocity on friction.

Mating Surfaces



Performance is optimized when the hardest possible running surface is used. Mild steel is acceptable. Softer shafts such as stainless steel or aluminum are not recommended. Special RULON® materials – such as RULON® J (see page 9) – are available for this type of service.

Surface Finish

Best performance is achieved with a surface finish in the 8 to 16 RMS range (0.2 to 0.4 µm Ra). However, acceptable performance can be obtained with finishes up to 32 microinches (0.8 µm Ra).

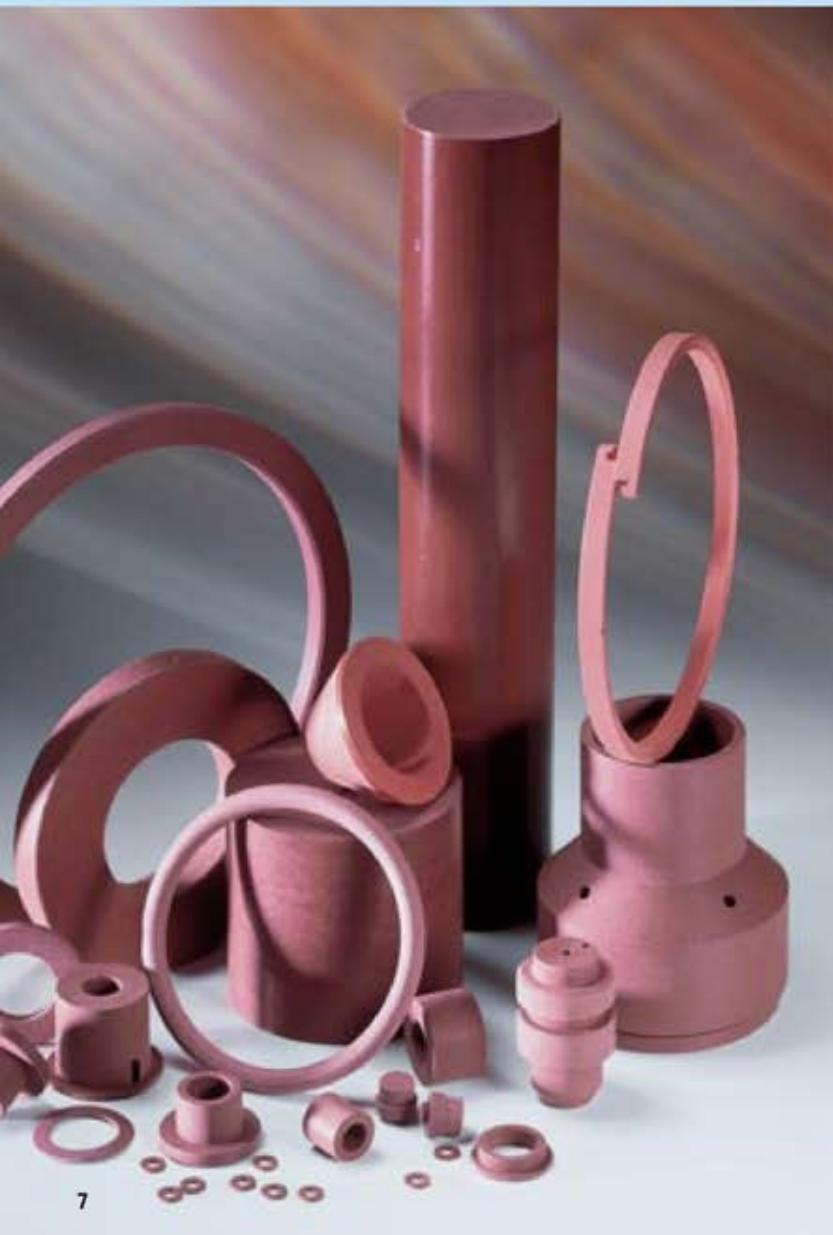

7

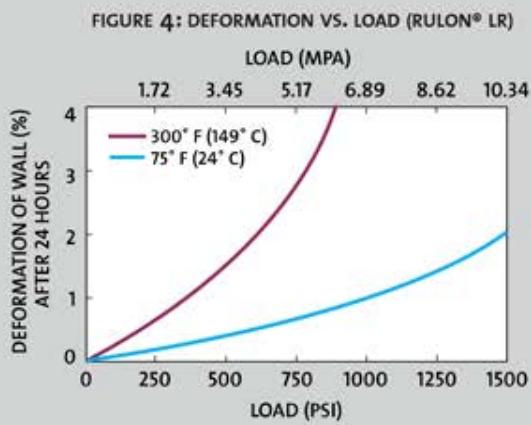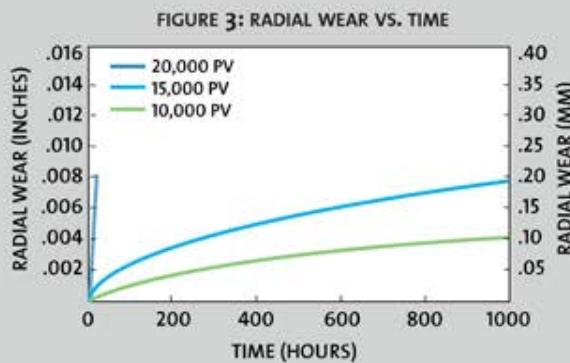

Bearing Failure

At elevated temperatures and heavy load, RULON® LR bearings will not shatter, but will merely deform. This limits sudden breakdowns and possible damage to other components.

Corrosion resistance

RULON® LR material is practically inert to all acids, bases and solvents.

Typical Applications

For bearings in:

- Dryer oven conveyors
- Vacuum metalizing equipment
- Photographic processing equipment
- Hydraulic actuators
- Machine tool ways and gib slides

Application Case Story

Rulon® LR was selected for this application because of its lubricity and ability to withstand abrasion.

The blender is used to incorporate pumice to a hand soap mixture. Occasionally, the pumice does infiltrate the bearing area, exacerbating the wear. The Rulon® LR bushing rides on a stainless steel expendable sleeve that is pressed onto a smaller diameter shaft. When the sleeve wears excessively, it and the bushing are replaced.



FIGURE 5: COEFFICIENT OF FRICTION VS. LOAD


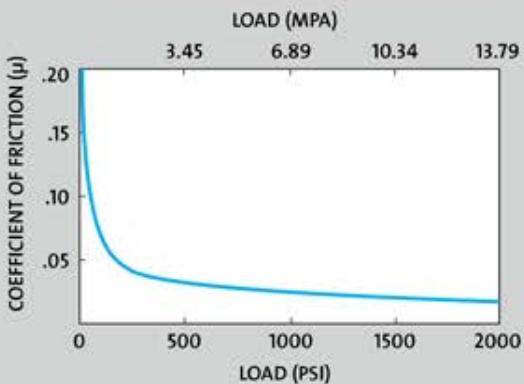


FIGURE 6: COEFFICIENT OF FRICTION VS. SPEED

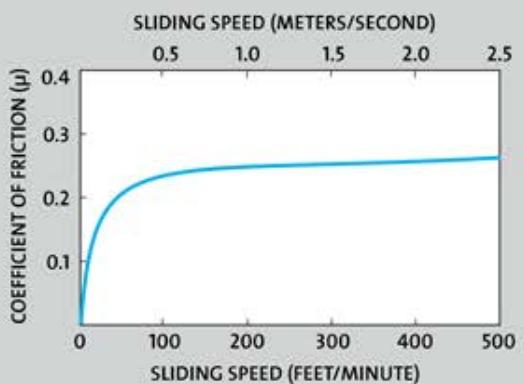

Rulon® J Bearings

RULON® J is an all-polymeric reinforced PTFE compound that operates satisfactorily against soft mating surfaces such as 316 stainless, aluminum, mild steel, and frequently, other plastics. The unique "shaft kindliness" of RULON® J is in addition to the expected attributes of low friction and wear, self-lubrication and long life.


In fact, RULON® J has the lowest coefficient of friction of any available reinforced PTFE. This makes it ideally suited for start/stop applications where stick-slip must be eliminated.

RULON® J bearings are designed to be dimensionally interchangeable with RULON® LR bearings and standard porous bronze and cast bronze bearings.

RULON® J has slightly less load capacity than RULON® LR (see *Figure 7*). It also has a different thermal expansion. Bearing clearances are the same for both RULON® LR and RULON® J bearings.

Thermal Expansion for RULON LR and J Bearings

Like most plastic material, RULON® compounds have a higher coefficient of thermal expansion than metals. This expansion is shown in *Figures 8* and *9*, which provide data for unconfined bearings.

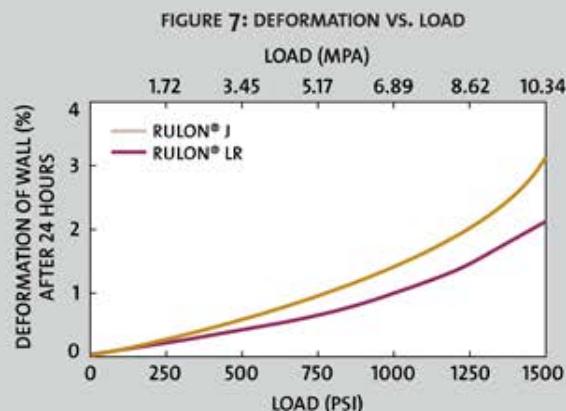

Bearings confined in the proper housing are only able to grow radially. Typically, one-third of the differential growth (between bearing O.D. and housing) results in compression of the RULON® material, and two-thirds results in close-in or reduction of the bearing I.D.

Standard RULON® LR and RULON® J stock bearings are designed with sufficient clearance to operate between -70°F (-57°C) and +200°F (+93°C) without altering the standard bearing sizes. For ambient temperatures above +200° F (+93°C), additional clearance should be provided. Other design options are available for high temperature service. Contact your local District Sales Manager to seek design assistance.

Typical Applications:

For bearings in:

- Plain paper copiers
- Medical equipment
- Anemometers
- Printer heads

Application Case Story

Piston Arm Wear Pads – Compressor Industry: Bonded Rulon® J slide pads replaced lubricated bronze on reciprocating piston guides for production compressors. Low friction and long, un-lubricated wear life were critical to the performance of the compressor. Rulon® J is also utilized as the piston cup on wobble style compressors.

FIGURE 8: THERMAL EXPANSION OF RULON® LR VS. TEMP


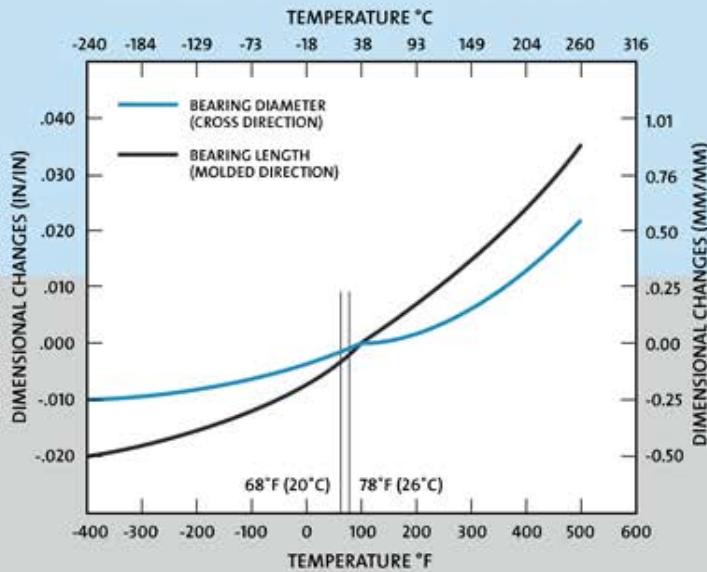


FIGURE 9: THERMAL EXPANSION OF RULON® J VS. TEMP

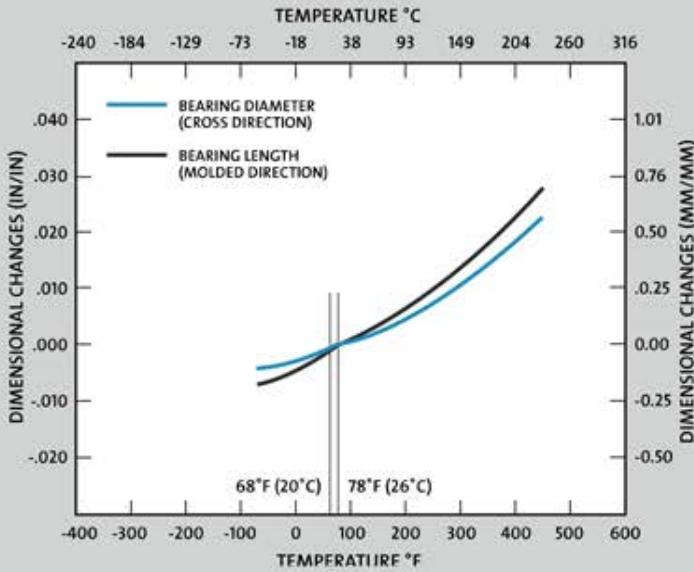

Yale
HOISTS

M
MELDIN®

perma
Lubrication Systems

BELZONA
Repair • Protect • Improve

WILFLEY
HEAVY DUTY
CENTRIFUGAL PUMPS

Flexitallic

Rulon® 641 Bearings

The RULON® 641 bearing overcomes the chronic problems that plague other food and drug contact bearings. For the first time ever, design engineers can have the following features in one non-lubricated bearing: FDA-cleared materials, excellent load and wear characteristics, wide ranging temperature capability and naturally white color.

Wear Characteristics

RULON® 641 offers excellent, continuous non-lubricated service at 10,000 lb.

ft./inch² x min (0.35 MPa x m/s) PV and higher. Figure 10 shows wear rates of RULON® 641 as a function of time at various PV values. For comparison, virgin PTFE at 5,000 lb. ft./inch² x min (0.175 MPa x m/s) PV is also shown. The mating surface is 316 stainless steel.

Mating Surfaces

RULON® 641 is compatible with mild steel, 303 and 316 stainless steel mating surfaces. Harder materials are also acceptable.

Temperature

RULON® 641 bearings can operate at temperatures ranging from -400°F (-240°C) to +550°F (+288°C). Additional clearance is required for higher temperatures due to thermal expansion effects.

Speed


RULON® 641 bearings are capable of speeds up to 400 feet per minute (2.0 meters per second) under dry, low-load operation.

Friction

Friction decreases rapidly with increasing load. Since friction at start-up and very slow speeds is extremely low, stick-slip is virtually non-existent with RULON® 641 bearings. This makes them ideal for oscillating or start/stop applications.



FIGURE 10: WEAR VS. TIME
AT VARIOUS PV's (RULON® 641)

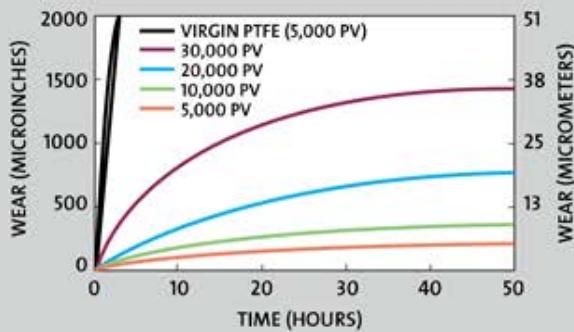

Load Capacity

RULON® 641 bearings are generally limited to 1,000 psi (6.9 MPa) at room temperature. However, actual deformation is a function of wall thickness, temperature and load.

Corrosion Resistance

RULON® 641 is unaffected by all common acids, bases and solvents.

Thermal Expansion

Like most plastic materials, RULON® 641 has a higher coefficient of thermal expansion than most metals. Figure 11 shows data for unconfined RULON® 641 bearings. Generally, I.D. close-in after being press fit into the housing is two-thirds of the total O.D. interference and should be taken into consideration during design.

Typical Applications


Since all the components of RULON® 641 are FDA-cleared and non-toxic, RULON® 641 bearings are perfect for use in machinery and equipment in the following applications:

- Food process machinery
- Food and drug conveyors
- Prepared meat products
- Frozen foods
- Animal and marine fats and oils
- Medicinal and pharmaceutical preparations


Application Case Story

In small conveyor grills, Rulon® 641 bearings located on the drive and idle rollers support the stainless conveyor belt. With cooking temperatures above 400°F (204°C) for 12-18 hours per day, Rulon® 641 bearings are subjected to difficult operating environments without lubrication. Traditional ball bearings and sintered metal bearings do not hold up in these environments for long and can produce a very annoying squeak.

FIGURE 11: THERMAL EXPANSION OF RULON® 641

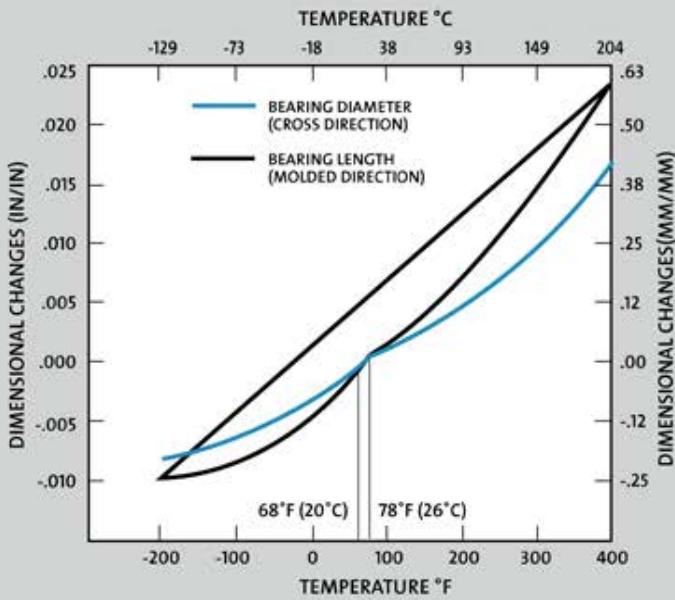

Standard Sizes for Rulon® LR, J&641 Bearings



SLEEVE BEARINGS

NOMINAL I.D. I.D. x O.D.	I.D. -.000", +.002"	O.D. -.000", +.002"	RECOMMENDED HOUSING BORE	PRESS FIT	RECOMMENDED SHAFT SIZE	LENGTH ± .005" (L)	RULON® LR PART NUMBER	RULON® J PART NUMBER	RULON® 641 PART NUMBER
1/8 x 1/4	.129	.251	.250/.249	.004/.001	.1250/.1240	1/4 3/8	DRS-0204-2 DRS-0204-3	DRJS-0204-2 DRJS-0204-3	
3/16 x 5/16	.191	.313	.312/.311	.004/.001	.1875/.1865	1/4 3/8 1/2	DRS-0305-2 DRS-0305-3 DRS-0305-4	DRJS-0305-2 DRJS-0305-3 DRJS-0305-4	
1/4 x 3/8	.254	.376	.375/.374	.004/.001	.2500/.2490	1/4 3/8 1/2	DRS-0406-2 DRS-0406-3 DRS-0406-4	DRJS-0406-2 DRJS-0406-3 DRJS-0406-4	DR65-0406-2 DR65-0406-3
5/16 x 1/2	.316	.501	.500/.499	.004/.001	.3125/.3115	3/8 1/2	DRS-0508-3 DRS-0508-4	DRJS-0508-3 DRJS-0508-4	
3/8 x 9/16	.379	.563	.562/.561	.004/.001	.3750/.3740	3/8 1/2 3/4	DRS-0609-3 DRS-0609-4 DRS-0609-6	DRJS-0609-3 DRJS-0609-4 DRJS-0609-6	DR65-0609-3
7/16 x 5/8	.441	.626	.625/.624	.004/.001	.4375/.4365	3/8 1/2 3/4	DRS-0710-3 DRS-0710-4 DRS-0710-6	DRJS-0710-3 DRJS-0710-4 DRJS-0710-6	
1/2 x 3/4	.504	.751	.750/.749	.004/.001	.5000/.4990	1/2 3/4 1	DRS-0812-4 DRS-0812-6 DRS-0812-8	DRJS-0812-4 DRJS-0812-6 DRJS-0812-8	DR65-0812-4
9/16 x 13/16	.567	.813	.812/.811	.004/.001	.5625/.5615	1/2 3/4 1	DRS-0913-4 DRS-0913-6 DRS-0913-8	DRJS-0913-4 DRJS-0913-6 DRJS-0913-8	
5/8 x 7/8	.630	.876	.875/.974	.004/.001	.6250/.6240	5/8 3/4 1	DRS-1014-5 DRS-1014-6 DRS-1014-8	DRJS-1014-5 DRJS-1014-6 DRJS-1014-8	DR65-1014-5
11/16 x 15/16	.693	.938	.937/.936	.004/.001	.6875/.6865	3/4	DRS-1115-6	DRJS-1115-6	
3/4 x 1	.755	1.001	1.000/.999	.004/.001	.7500/.7490	1/2 3/4 1 1-1/2	DRS-1216-4 DRS-1216-6 DRS-1216-8 DRS-1216-12	DRJS-1216-4 DRJS-1216-6 DRJS-1216-8 DRJS-1216-12	DR65-1216-6
7/8 x 1-1/8	.880	1.126	1.125/1.124	.004/.001	.8750/.8740	3/4 1	DRS-1418-6 DRS-1418-8	DRJS-1418-6 DRJS-1418-8	
1 x 1-1/4	1.005	1.251	1.250/1.249	.004/.001	1.000/.9990	3/4 1 1-1/2	DRS-1620-6 DRS-1620-8 DRS-1620-12	DRJS-1620-6 DRJS-1620-8 DRJS-1620-12	DR65-1620-8
1-1/8 x 1-3/8	1.130	1.376	1.375/1.374	.004/.001	1.125/1.124	3/4 1 1-1/2	DRS-1822-6 DRS-1822-8 DRS-1822-12	DRJS-1822-6 DRJS-1822-8 DRJS-1822-12	
1-1/4 x 1-1/2	1.255	1.501	1.500/1.499	.004/.001	1.250/1.249	3/4 1 1-1/2 2	DRS-2024-6 DRS-2024-8 DRS-2024-12 DRS-2024-16	DRJS-2024-6 DRJS-2024-8 DRJS-2024-12 DRJS-2024-16	DR65-2024-16
1-3/8 x 1-5/8	1.380	1.626	1.625/1.624	.004/.001	1.375/1.374	1 1-1/2	DRS-2226-8 DRS-2226-12	DRJS-2226-8 DRJS-2226-12	
1-1/2 x 1-3/4	1.506	1.751	1.750/1.749	.004/.001	1.500/1.499	1 1-1/2 2	DRS-2428-8 DRS-2428-12 DRS-2428-16	DRJS-2428-8 DRJS-2428-12 DRJS-2428-16	DR65-2428-16
1-5/8 x 1-7/8	1.631	1.876	1.875/1.874	.004/.001	1.625/1.6235	1-3/4	DRS-2630-14		
1-3/4 x 2	1.756	2.001	2.000/1.999	.004/.001	1.750/1.7485	1-3/4	DRS-2832-14		
1-7/8 x 2-1/8	1.881	2.126	2.125/2.124	.004/.001	1.875/1.8735	2	DRS-3034-16		
2 x 2-1/4	2.006	2.251	2.250/2.247	.006/.001	2.000/1.9985	2 2-1/2	DRS-3236-16* DRS-3236-20*		
2-1/4 x 2-1/2	2.259	2.502	2.500/2.497	.008/.002	2.250/2.2485	2-1/2	DRS-3640-20*		
2-1/2 x 2-3/4	2.510	2.752	2.750/2.747	.008/.002	2.500/2.498	2-1/2	DRS-4044-20*		
2-3/4 x 3	2.760	3.002	3.000/2.997	.008/.002	2.750/2.748	3	DRS-4448-24*		
3 x 3-1/4	3.011	3.252	3.250/3.247	.008/.002	3.000/2.998	3	DRS-4852-24*		

* I.D. AND O.D. -.000 + .003

CONTACT SAINT-GOBAIN PERFORMANCE PLASTICS CUSTOMER SERVICE AT 800-222-4066 FOR A DISTRIBUTOR IN YOUR AREA



Yale
HOISTS




perma
Lubrication Systems



WILFLEY
HEAVY DUTY
CENTRIFUGAL PUMPS


Flexitallic



FLANGE BEARINGS

NOMINAL I.D. x O.D.	I.D. -000", +002"	O.D. -000", +002"	RECOMMENDED HOUSING BORE	PRESS FIT	RECOMMENDED SHAFT SIZE	FLANGE DIA ± .005"	FLANGE THK ± .003"	LENGTH ± .005"	RULON® LR PART NUMBER	RULON® J PART NUMBER	RULON® 641 PART NUMBER
3/16 x 5/16	.191	.313	.312/.311	.004/.001	.1875/.1865	.437	.1/16	.1/4	DRF-0305-2	DRJF-0305-2	
								.1/2	DRF-0305-4	DRJF-0305-4	
1/4 x 3/8	.254	.376	.375/.374	.004/.001	.2500/.2490	.500	.1/16	.3/8	DRF-0406-3	DRJF-0406-3	
								.1/2	DRF-0406-4	DRJF-0406-4	DR6F-0406-4
3/8 x 5/8	.379	.626	.625/.624	.004/.001	.3750/.3740	.875	.1/8	.1/2	DRF-0610-4	DRJF-0610-4	DR6F-0610-4
								.3/4	DRF-0610-6	DRJF-0610-6	
1/2 x 3/4	.504	.751	.750/.749	.004/.001	.5000/.4990	1.000	.1/8	.1/2	DRF-0812-4	DRJF-0812-4	
								.3/4	DRF-0812-6	DRJF-0812-6	
								1	DRF-0812-8	DRJF-0812-8	DR6F-0812-8
5/8 x 7/8	.630	.876	.875/.874	.004/.001	.6250/.6240	1.000	.1/8	.3/4	DRF-1014-6	DRJF-1014-6	
								1	DRF-1014-8	DRJF-1014-8	DR6F-1014-8
3/4 x 1	.755	1.001	1.000/.999	.004/.001	.7500/.7490	1.250	.1/8	1	DRF-1216-8	DRJF-1216-8	DR6F-1216-8
1 x 1-1/4	1.005	1.251	1.250/1.249	.004/.001	1.0000/.9990	1.500	.1/8	1-1/2	DRF-1620-12	DRJF-1620-12	DR6F-1620-12
1-1/4 x 1-1/2	1.255	1.501	1.500/1.499	.004/.001	1.2500/1.2490	1.750	.1/8	2	DRF-2024-16	DRJF-2024-16	DR6F-2024-16
1-1/2 x 1-3/4	1.506	1.751	1.750/1.749	.004/.001	1.5000/1.4990	2.000	.1/8	2	DRF-2428-16	DRJF-2428-16	DR6F-2428-16
1-3/4 x 2	1.756	2.001	2.000/1.999	.005/.001	1.750/1.749	2.250	.1/8	3	DRF-2832-24*		
2 x 2-1/4	2.006	2.251	2.250/2.249	.005/.001	2.000/1.999	2.500	.1/8	3	DRF-3236-24*		

* I.D. AND O.D. -.000 + .003



THRUST BEARINGS

NOMINAL I.D. x O.D.	I.D. -000", +005"	O.D. +000", -003"	THICKNESS ± .003"	RULON® LR PART NUMBER	RULON® J PART NUMBER
1/4 x 3/8	.254	.376	.060	DRT-0406-2	DRJT-0406-2
3/8 x 3/4	.379	.750	.060	DRT-0612-2	DRJT-0612-2
1/2 x 1	.504	1.000	.060	DRT-0816-2	DRJT-0816-2
3/4 x 1-3/8	.755	1.375	.1/8	DRT-1222-4*	DRJT-1222-4*
1 x 2	1.005	2.000	.1/8	DRT-1632-4*	DRJT-1632-4*
1-1/2 x 3	1.506	3.000	.1/8	DRT-2448-4*	DRJT-2448-4*

* I.D. AND O.D. -.000 + .006

SELF-READING PART NUMBERING SYSTEM

The first two characters of the composite part number are constant and stand for Rulon® LR. The third character is the material code that corresponds to the desired material. If no code is listed, then the material is always Rulon® LR. The type follows next and they are; (S) sleeve, (F) flange, and (T) thrust bearing.

Aside from the available listed sizes on the previous tables, all listed standard bearing sizes can be requested in these materials. These are special request items subject to special pricing and delivery.

D R 7 S - 1 6 2 0 - 8 =

↑ BEARING TYPE ↑ I.D. (IN 1/16" INCREMENTS) ↑ O.D. (IN 1/16" INCREMENTS) ↑ BEARING LENGTH (IN 1/8" INCREMENTS)

RULON® 1337 SLEEVE BEARING
NOMINAL I.D. 1"
NOMINAL O.D. 1.25"
LENGTH 1"

RULON® MATERIAL CODES

RULON® J	641	W2	123	488	957	XL	F	142	945	1045	1337	1410	1439	AR
CODE:	J	6	W	1	4	X	F	z	5	0	7	3	8	A


CONTACT SAINT-GOBAIN PERFORMANCE PLASTICS CUSTOMER SERVICE AT 800-223-4966 FOR A DISTRIBUTOR IN YOUR AREA.



Standard Metric Sizes for Rulon® Bearings


SLEEVE BEARINGS - ALL DIMENSIONS IN MILLIMETERS

NOMINAL I.D. x O.D.	I.D. (A)	O.D. (B)	RECOMMENDED HOUSING BORE	LENGTH (L)	PART NUMBER
3x6	3.21/3.16	6.09/6.04	6.0/5.98	5.0/4.8	MRS0306-5
4x7	4.21/4.16	7.09/7.04	7.0/6.98	6.0/5.8	MRS0407-6
5x8	5.21/5.16	8.09/8.04	8.0/7.98	6.0/5.8	MRS0508-6
6x9	6.21/6.16	9.09/9.04	9.0/8.98	8.0/7.8	MRS0609-8
7x11	7.23/7.18	11.10/11.05	11.0/10.98	8.0/7.8	MRS0711-8
8x12	8.23/8.18	12.10/12.05	12.0/11.98	8.0/7.8	MRS0812-8
9x13	9.23/9.18	13.10/13.05	13.0/12.98	10.0/9.75	MRS0913-10
10x14	10.24/10.19	14.10/14.05	14.0/13.98	10.0/9.75	MRS1014-10
12x16	12.24/12.19	16.10/16.05	16.0/15.98	10.0/9.75	MRS1216-10
15x21	15.27/15.20	21.10/21.05	21.0/20.98	15.0/14.75	MRS1521-15
17x23	17.27/17.20	23.10/23.05	23.0/22.98	15.0/14.75	MRS1723-15
20x26	20.33/20.21	26.11/26.06	26.0/25.98	20.0/19.75	MRS2026-20
22x28	22.33/22.21	28.11/28.06	28.0/27.98	20.0/19.75	MRS2228-20
25x31	25.33/25.21	31.11/31.06	31.0/30.98	25.0/24.75	MRS2531-25
28x34	28.33/28.21	34.11/34.06	34.0/33.98	30.0/29.75	MRS2834-30
30x36	30.33/30.22	36.11/36.06	36.0/35.98	30.0/29.75	MRS3036-30
32x40	32.38/32.22	40.11/40.06	40.0/39.98	30.0/29.75	MRS3240-30
35x43	35.38/35.22	43.11/43.06	43.0/42.98	35.0/34.75	MRS3543-35
40x48	40.38/40.22	48.11/48.06	48.0/47.98	40.0/39.75	MRS4048-40
45x53	45.39/45.20	53.11/53.06	53.0/52.97	50.0/49.75	MRS4553-50
50x60	50.39/50.24	60.11/60.06	60.0/59.97	50.0/49.75	MRS5060-50



FLANGE BEARINGS - ALL DIMENSIONS IN MILLIMETERS

NOMINAL I.D. x O.D.	I.D. (A)	O.D. (B)	FLANGE DIAMETER (C)	FLANGE THICKNESS (D)	RECOMMENDED HOUSING BORE	LENGTH (L)	PART NUMBER
3x6	3.21/3.16	6.09/6.04	9	1.55/1.50	6.0/5.98	5.0/4.8	MRF0306-5
4x7	4.21/4.16	7.09/7.04	9	1.55/1.50	7.0/6.98	6.0/5.8	MRF0407-6
5x8	5.21/5.16	8.09/8.04	11	1.55/1.50	8.0/7.98	8.0/7.8	MRF0508-8
6x9	6.21/6.16	9.09/9.04	12	1.55/1.50	9.0/8.98	8.0/7.8	MRF0609-8
7x11	7.23/7.18	11.10/11.05	15	2.05/2.00	11.0/10.98	10.0/9.8	MRF0711-10
8x12	8.23/8.18	12.10/12.05	16	2.05/2.00	12.0/11.98	10.0/9.8	MRF0812-10
9x13	9.23/9.18	13.10/13.05	17	2.05/2.00	13.0/12.98	10.0/9.75	MRF0913-10
10x14	10.24/10.19	14.10/14.05	18	2.05/2.00	14.0/13.98	15.0/14.75	MRF1014-15
12x16	12.24/12.19	16.10/16.05	20	2.05/2.00	16.0/15.98	15.0/14.75	MRF1216-15
15x21	15.27/15.20	21.10/21.05	27	3.05/3.00	21.0/20.98	20.0/19.75	MRF1521-20
17x23	17.27/17.20	23.10/23.05	29	3.05/3.00	23.0/22.98	20.0/19.75	MRF1723-20
20x26	20.33/20.21	26.11/26.06	32	3.05/3.00	26.0/25.98	25.0/24.75	MRF2026-25
22x28	22.33/22.21	28.11/28.06	34	3.05/3.00	28.0/27.98	25.0/24.75	MRF2228-25
25x31	25.33/25.21	31.11/31.06	37	3.05/3.00	31.0/30.98	30.0/29.75	MRF2531-30
28x34	28.33/28.21	34.11/34.06	40	3.05/3.00	34.0/33.98	30.0/29.75	MRF2834-30
30x36	30.33/30.22	36.11/36.06	42	3.05/3.00	36.0/35.98	35.0/34.75	MRF3036-35
32x40	32.38/32.22	40.11/40.06	48	4.05/4.00	40.0/39.98	35.0/34.75	MRF3240-35
35x43	35.38/35.22	43.11/43.06	51	4.05/4.00	43.0/42.98	40.0/39.75	MRF3543-40
40x48	40.38/40.22	48.11/48.06	56	4.05/4.00	48.0/47.98	45.0/44.75	MRF4048-45
45x53	45.39/45.23	53.11/53.06	61	4.05/4.00	53.0/52.97	50.0/49.75	MRF4553-50
50x60	50.39/50.24	60.11/60.06	70	5.05/5.00	60.0/59.97	60.0/59.75	MRF5060-60



CONTACT SAINT-GOBAIN PERODA/LANCE DIRECTORIAL CUSTOMER SERVICE AT 800.322.4066 FOR A DISTRIBUTOR IN YOUR AREA.



Yale
HOISTS




perma
Lubrication Systems



WILFLEY®
HEAVY DUTY
CENTRIFUGAL PUMPS

Flexitallic



THRUST BEARINGS - ALL DIMENSIONS IN MILLIMETERS

NOMINAL I.D. x O.D.	I.D., +0.00, -0.25 (A)	O.D., +0.00, -0.25 (B)	THICKNESS ±0.06 (L)	PART NUMBER
6x13	6.2	12.8	0.8	MRT0613
7x15	7.2	14.8	0.8	MRT0715
8x15	8.2	14.8	0.8	MRT0815
9x20	9.2	19.8	0.8	MRT0920
10x20	10.2	19.8	0.8	MRT1020
12x25	12.2	24.7	0.8	MRT1225
15x30	15.3	29.7	0.8	MRT1530
17x35	17.3	34.6	0.8	MRT1735
20x40	20.4	39.6	0.8	MRT2040
22x45	22.4	44.5	0.8	MRT2245
25x50	25.4	49.5	0.8	MRT2550
28x55	28.4	54.4	0.8	MRT2855
30x60	30.4	59.4	0.8	MRT3060
32x60	32.4	59.4	0.8	MRT3260
35x65	35.6	64.3	0.8	MRT3565
40x70	40.6	69.3	0.8	MRT4070
45x75	45.6	74.2	0.8	MRT4575
50x80	50.8	79.2	0.8	MRT5080

SELF-READING PART NUMBERING SYSTEM

M R S - 0 8 1 2 - 8 = RULON® LR SLEEVE BEARING
 ↑ ↑ ↑
 RULON® I.D. O.D.
 METRIC (IN MM INCREMENTS) BEARING
 LENGTH
 (IN MM
 INCREMENTS)

RULON® MATERIAL CODES

RULON®:	J	641	W2	123	488	957	XL	F	142	945	1045	1337	1410	1439	AR
Code:	J	6	W	1	4	9	X	F	Z	5	0	7	3	8	A


CONTACT SAINT-GOBAIN PERFORMANCE PLASTICS CUSTOMER SERVICE AT 800-223-4966 FOR A DISTRIBUTOR IN YOUR AREA.


New Metric Sizes for Rulon® Bearings

All dimensions are based on temperature up to max 120°C
and for hardware tolerance H7 and h7 according to DIN1850 BL6.

SLEEVE BEARINGS - ALL DIMENSIONS IN MILLIMETERS

INSIDE DIAMETER ID (A)			OUTSIDE DIAMETER OD (B)			LENGTH (L)			PART NUMBER
NOMINAL SIZE	TOLERANCES MIN	TOLERANCES MAX	NOMINAL SIZE	TOLERANCES MIN	TOLERANCES MAX	NOMINAL SIZE	TOLERANCES MIN	TOLERANCES MAX	
3	0.15	0.20	6	0.06	0.11	5	-0.25	0.00	MRS030-060-05
4	0.15	0.20	7	0.06	0.11	6	-0.25	0.00	MRS040-070-06
5	0.15	0.20	8	0.06	0.11	6	-0.25	0.00	MRS050-080-06
6	0.15	0.20	9	0.06	0.11	8	-0.25	0.00	MRS060-090-08
7	0.17	0.22	11	0.07	0.12	8	-0.25	0.00	MRS070-110-08
8	0.17	0.22	12	0.07	0.12	8	-0.25	0.00	MRS080-120-08
9	0.17	0.22	13	0.07	0.12	10	-0.25	0.00	MRS090-130-10
10	0.17	0.22	14	0.07	0.12	10	-0.25	0.00	MRS100-140-10
12	0.18	0.23	16	0.07	0.12	10	-0.25	0.00	MRS120-160-10
15	0.20	0.25	21	0.08	0.13	15	-0.25	0.00	MRS150-210-15
16	0.20	0.25	22	0.08	0.13	15	-0.25	0.00	MRS160-220-15
17	0.20	0.25	23	0.08	0.13	15	-0.25	0.00	MRS170-230-15
18	0.20	0.25	24	0.08	0.13	20	-0.25	0.00	MRS180-240-20
20	0.20	0.25	26	0.08	0.13	20	-0.25	0.00	MRS200-260-20
22	0.20	0.25	28	0.08	0.13	20	-0.25	0.00	MRS220-280-20
25	0.21	0.26	31	0.09	0.14	25	-0.25	0.00	MRS250-310-25
25	0.22	0.27	32	0.09	0.14	30	-0.25	0.00	MRS250-320-30
28	0.21	0.26	34	0.09	0.14	30	-0.25	0.00	MRS280-340-30
28	0.23	0.28	36	0.09	0.14	30	-0.25	0.00	MRS280-360-30
30	0.21	0.28	36	0.09	0.14	30	-0.25	0.00	MRS300-360-30
30	0.23	0.28	38	0.09	0.14	30	-0.25	0.00	MRS300-380-30
32	0.23	0.28	40	0.09	0.14	30	-0.25	0.00	MRS320-400-30
35	0.23	0.28	43	0.09	0.14	35	-0.25	0.00	MRS350-430-35
35	0.25	0.30	45	0.09	0.14	40	-0.25	0.00	MRS350-450-40
40	0.23	0.28	48	0.09	0.14	40	-0.25	0.00	MRS400-480-40
40	0.25	0.30	50	0.09	0.14	40	-0.25	0.00	MRS400-500-40
45	0.24	0.29	53	0.10	0.15	50	-0.25	0.00	MRS450-530-50
45	0.26	0.31	55	0.10	0.15	40	-0.25	0.00	MRS450-550-40
50	0.26	0.31	60	0.10	0.15	50	-0.25	0.00	MRS500-600-50





FLANGE BEARINGS - ALL DIMENSIONS IN MILLIMETERS

INSIDE DIAMETER ID (A)				OUTSIDE DIAMETER OD (B)				FLANGE DIAMETER FD (C)				LENGTH (L)				FLANGE THICKNESS FT (D)				PART NUMBER
NOMINAL SIZE	TOLERANCES MIN	TOLERANCES MAX	NOMINAL SIZE	TOLERANCES MIN	TOLERANCES MAX	NOMINAL SIZE	TOLERANCES MIN	TOLERANCES MAX	NOMINAL SIZE	TOLERANCES MIN	TOLERANCES MAX	NOMINAL SIZE	TOLERANCES MIN	TOLERANCES MAX	NOMINAL SIZE	TOLERANCES MIN	TOLERANCES MAX			
3	0.15	0.20	6	0.06	0.11	9	-0.10	0.10	5	-0.25	0.00	1.5	0.00	0.50	MRF030-060-05					
4	0.15	0.20	7	0.06	0.11	9	-0.10	0.10	6	-0.25	0.00	1.5	0.00	0.50	MRF040-070-06					
5	0.15	0.20	8	0.06	0.11	11	-0.10	0.10	8	-0.25	0.00	1.5	0.00	0.50	MRF050-080-08					
6	0.15	0.20	9	0.06	0.11	12	-0.10	0.10	8	-0.25	0.00	2	0.00	0.50	MRF060-090-08					
7	0.17	0.22	11	0.07	0.12	16	-0.10	0.10	10	-0.25	0.00	2	0.00	0.50	MRF070-110-10					
8	0.17	0.22	12	0.07	0.12	16	-0.10	0.10	10	-0.25	0.00	2	0.00	0.50	MRF080-120-10					
9	0.17	0.22	13	0.07	0.12	17	-0.10	0.10	10	-0.25	0.00	2	0.00	0.50	MRF090-130-10					
10	0.17	0.22	14	0.07	0.12	18	-0.10	0.10	15	-0.25	0.00	2	0.00	0.50	MRF100-140-15					
12	0.18	0.22	16	0.07	0.12	20	-0.10	0.10	15	-0.25	0.00	2	0.00	0.50	MRF120-160-15					
15	0.20	0.25	21	0.08	0.13	27	-0.10	0.10	20	-0.25	0.00	3	0.00	0.50	MRF150-210-20					
16	0.20	0.25	22	0.08	0.13	28	-0.10	0.10	20	-0.25	0.00	3	0.00	0.50	MRF160-220-20					
17	0.20	0.25	23	0.08	0.13	29	-0.10	0.10	20	-0.25	0.00	3	0.00	0.50	MRF170-230-20					
18	0.20	0.25	24	0.08	0.13	30	-0.10	0.10	20	-0.25	0.00	3	0.00	0.50	MRF180-240-20					
20	0.20	0.25	26	0.08	0.13	32	-0.10	0.10	25	-0.25	0.00	3	0.00	0.50	MRF200-260-25					
22	0.20	0.25	28	0.08	0.13	34	-0.10	0.10	25	-0.25	0.00	3	0.00	0.50	MRF220-280-25					
25	0.21	0.26	31	0.09	0.14	37	-0.10	0.10	30	-0.25	0.00	3	0.00	0.50	MRF250-310-30					
25	0.22	0.27	32	0.09	0.14	38	-0.10	0.10	30	-0.25	0.00	4	0.00	0.50	MRF250-320-30					
28	0.21	0.26	34	0.09	0.14	40	-0.10	0.10	30	-0.25	0.00	3	0.00	0.50	MRF280-340-30					
28	0.23	0.28	36	0.09	0.14	42	-0.10	0.10	30	-0.25	0.00	4	0.00	0.50	MRF280-360-30					
30	0.21	0.26	36	0.09	0.14	42	-0.10	0.10	35	-0.25	0.00	3	0.00	0.50	MRF300-360-35					
30	0.23	0.28	38	0.09	0.14	44	-0.10	0.10	30	-0.25	0.00	4	0.00	0.50	MRF300-380-30					
32	0.23	0.28	40	0.09	0.14	48	-0.10	0.10	35	-0.25	0.00	4	0.00	0.50	MRF320-400-35					
35	0.23	0.28	43	0.09	0.14	51	-0.10	0.10	40	-0.25	0.00	4	0.00	0.50	MRF350-430-40					
35	0.25	0.30	45	0.09	0.14	50	-0.10	0.10	40	-0.25	0.00	5	0.00	0.50	MRF350-450-40					
40	0.23	0.28	48	0.09	0.14	56	-0.10	0.10	45	-0.25	0.00	4	0.00	0.50	MRF400-480-45					
40	0.25	0.30	50	0.09	0.14	56	-0.10	0.10	40	-0.25	0.00	5	0.00	0.50	MRF400-500-40					
45	0.24	0.29	53	0.10	0.15	61	-0.10	0.10	50	-0.25	0.00	4	0.00	0.50	MRF450-530-50					
45	0.26	0.31	55	0.10	0.15	63	-0.10	0.10	40	-0.25	0.00	5	0.00	0.50	MRF450-550-40					
50	0.26	0.31	60	0.10	0.15	70	-0.10	0.10	50	-0.25	0.00	5	0.00	0.50	MRF500-600-50					

CONTACT SAINT-GOBAIN PERFORMANCE PLASTICS CUSTOMER SERVICE AT 800-223-4966 FOR A DISTRIBUTOR IN YOUR AREA.



Yale
HOISTS




perma®
Lubrication Systems



WILFLEY®
HEAVY DUTY
CENTRIFUGAL PUMPS

Flexitallic



THRUST BEARINGS - ALL DIMENSIONS IN MILLIMETERS

NOMINAL SIZE	INSIDE DIAMETER ID (A)		OUTSIDE DIAMETER OD (B)		RECOMMENDED HOUSING BORE (L)		PART NUMBER
	NOMINAL	TOLERANCES MIN MAX	NOMINAL	TOLERANCES MIN MAX	LENGTH	TOLERANCE	
6x13	6.2	0.25	12.8	-0.25 12.8	0.8	± 0.06	MRT060-130-08
7x15	7.2	0.25	14.8	-0.25 14.8	0.8	± 0.06	MRT070-150-08
8x15	8.2	0.25	14.8	-0.25 14.8	0.8	± 0.06	MRT080-150-08
9x20	9.2	0.25	19.8	-0.25 19.8	0.8	± 0.06	MRT090-200-08
10x20	10.2	0.25	19.8	-0.25 19.8	0.8	± 0.06	MRT100-200-08
12x25	12.2	0.25	24.7	-0.25 24.7	0.8	± 0.06	MRT120-250-08
15x30	15.3	0.25	29.7	-0.25 29.7	0.8	± 0.06	MRT150-300-08
17x35	17.3	0.25	34.6	-0.25 34.6	0.8	± 0.06	MRT170-350-08
20x40	20.4	0.25	39.6	-0.25 39.6	0.8	± 0.06	MRT200-400-08
20x70	20.4	0.25	69.2	-0.25 69.2	0.8	± 0.06	MRT200-700-08
22x45	22.4	0.25	44.5	-0.25 44.5	0.8	± 0.06	MRT220-450-08
25x50	25.4	0.25	49.5	-0.25 49.5	0.8	± 0.06	MRT250-500-08
28x55	28.4	0.25	54.4	-0.25 54.4	0.8	± 0.06	MRT280-550-08
30x60	30.4	0.25	59.4	-0.25 59.4	0.8	± 0.06	MRT300-600-08
32x60	32.4	0.25	59.4	-0.25 59.4	0.8	± 0.06	MRT320-600-08
35x65	35.6	0.25	64.3	-0.25 64.3	0.8	± 0.06	MRT350-650-08
40x70	40.6	0.25	69.3	-0.25 69.3	0.8	± 0.06	MRT400-700-08
45x75	45.6	0.25	74.2	-0.25 74.2	0.8	± 0.06	MRT450-750-08
50x80	50.8	0.25	79.2	-0.25 79.2	0.8	± 0.06	MRT500-800-08



Yale
HOISTS



WILFLEY
HEAVY DUTY
CENTRIFUGAL PUMPS

Flexitallic

**Saint-Gobain Performance Plastics**

386 Metacomet Avenue
Bristol, RI 02809
Tel: 401-253-2000
Toll Free: 800-223-4966
Fax: 401-253-8211
www.Rulon-Meldin.com

RULON® APPLICATION INQUIRY FORM

NOTE: Please attach any helpful comments/sketches.

CUSTOMER INFORMATION

COMPANY:

STREET:

CITY, ST. ZIP:

ENGINEERING CONTACT

TELEPHONE No.

FAX No.

PURCHASING CONTACT:

TELEPHONE No.

FAX No.

ACTION REQUIRED	DATE NEEDED	QUOTATION GENERALITIES
MATERIAL RECOMMENDATION <input type="checkbox"/>		QUOTE PRODUCTION QUANTITIES OF:
PROVIDE TECH DATA ON MATERIAL <input type="checkbox"/>		
PART DESIGN RECOMMENDATION <input type="checkbox"/>		SEND QUOTE TO:
PRODUCE PROTOTYPES <input type="checkbox"/>		QUOTE DUE DATE:

PRODUCT INFORMATION (ATTACH DRAWING OR SKETCH IF AVAILABLE)

DESIGN: NEW EXISTING

BEARING* SIZE: UNITS: IN MM

*For non-bearing application, attach drawing

IF EXISTING:

TYPE/BRAND:

ID:

OD:

MATERIAL:

LENGTH:

FLANGE OD:

PART/DRAWING No.:

FLANGE THICKNESS:

DESCRIBE END USES:

OTHER DIMENSIONS:

DESIRED CHARACTERISTICS:

OTHER COMMENTS:



Yale
HOISTS

M
MELDIN®

perma
Lubrication Systems

BELZONA
Repair • Protect • Improve

WILFLEY®
HEAVY DUTY
CENTRIFUGAL PUMPS

Flexitallic

RULON® APPLICATION INQUIRY FORM

APPLICATION PARAMETERS

PART INSTALLATION

- PRESS FIT ON OD:
- SHRINK FIT ON ID:
- MECHANICAL MEANS:
- SLIP FIT:
- BONDING:
- OTHER: (List)

SHAFT SPECIFICATIONS

DIAMETER (& TOLERANCE)

MATERIAL TYPE:

SURFACE FINISH:

HARDNESS:

TEMPERATURE

TYPICAL: °F °C

MAXIMUM: °F °C

DURATION: Min. Hrs.

MINIMUM: °F °C

DURATION: Min. Hrs.

HOUSING SPECIFICATIONS

DIAMETER (& TOLERANCE):

MATERIAL TYPE:

LENGTH (& TOLERANCE):

LOAD

RADIAL THRUST

UNITS: LB PSI N/MM² OTHER:

CANTILEVERED IMPACT

CONSTANT MISALIGNMENT

TYPICAL:

MAXIMUM:

Duration:

MINIMUM:

Duration:

VELOCITY

UNITS: RPM FT/MIN M/SEC

LINEAR/STROKE LENGTH:

NUMBER OF STROKES/MIN:

ROTARY:

DEGREE OF OSCILLATION:

NUMBER OF CYCLES/MIN:

OTHER:

RUNNING SURFACE: ID OD FACE

ENVIRONMENT

DRY WATER LUBRICATED

CLEAN DIRT VACUUM

CHEMICALS: SPECIFY

GASES: SPECIFY

OIL: (TYPE)

SERVICE LIFE

CURRENT:

DESIRED:

PRODUCT VALIDATION

BENCH:

FIELD:

BOTH:

PRODUCT TESTING

TEST START DATE:

TEST DURATION:



Yale
HOISTS




perma
Lubrication Systems

BELZONA
Repair • Protect • Improve

WILFLEY
HEAVY DUTY
CENTRIFUGAL PUMPS

Flexitallic


Other Saint-Gobain Performance Plastics Catalogs



RULON®

A guide to available products and 15 of the most popular grades of RULON®. This brochure describes the materials, their properties, features and benefits. Information is provided on performance characteristics and guidelines for applying each material.

Various forms of materials that are available are described and products and applications where they have been used are listed.




Meldin®

Meldin 1000 – Injection moldable thermoplastic material used in temperatures of 400°F (204°C) or lower, where more demanding chemical resistance is needed.

Meldin 2000 – Thermosetting polyimide product for use in continuous temperatures of up to 600°F (316°C) in structural and bearing applications. Available in rod and sheet or machined parts.

Meldin 3000 – Injection moldable polyimide material used in temperatures of 550°F (288°C) or lower, requiring no additional annealing.

Meldin 5000 – Injection moldable thermoplastic material used in temperatures of 550°F (288°C) or lower, where more demanding chemical resistance is needed.




Meldin® 7000

Premium polyimide direct formable materials suitable for high volume production, for use in 600°F (316°C) or lower applications. Available in custom finished parts only, except as noted.





MATERIALES INDUSTRIALES CETA S.A. DE C.V.

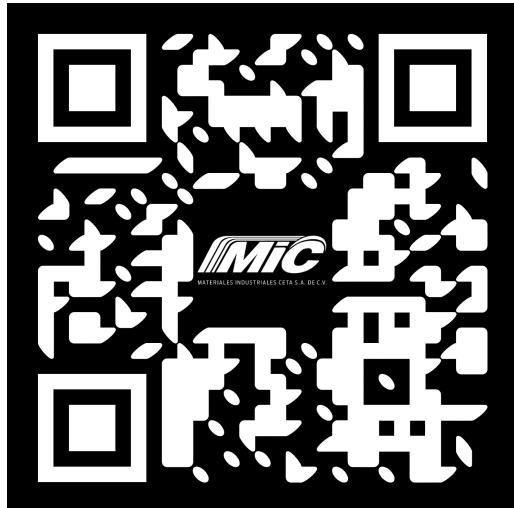

WWW.MATINDCETA.COM

Matriz Tampico

833 227 56 56 833 227 56 57
833 227 56 58 833 227 58 79
833 227 58 80 833 227 48 00

ventas@matindceta.com

Suc. Coatza

921 212 15 45

ventascoatza@matindceta.com ventasqro@matindceta.com

Suc. Centro

442 210 68 45

